


Inox
ITEM: A2226

ISO thread DIN 13 coarse pitch

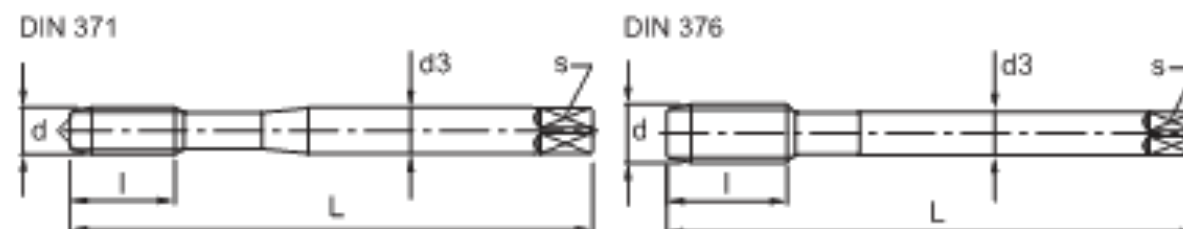
Tolerance 6H ISO 2

Surface finish TiNOX +

Thread depth ≤ 2XD

Hole type Through

Chamfer form B 4/5

Application Stainless steel with R < 1400 N/mm²


< 500	< 850	< 1200	< 600	< 850	Duplex	< 240	< 300	< 10% Si	> 10% Si	Brass Copper	Bronze	Ti6Al4V	HTA	< 45	< 60
●			●	●	●										

TAP DIN 371

A2226	Tech. Code	d x p mm	L mm	l mm	d3 mm	s mm	Tapping hole mm
	A2226M3	3 x 0.5	56	10	3.5	2.7	2.5
	A2226M4	4 x 0.7	63	12	4.5	3.4	3.3
	A2226M5	5 x 0.8	70	14	6	4.9	4.2

A2226	Tech. Code	d x p mm	L mm	l mm	d3 mm	s mm	Tapping hole mm
	A2226M6	6 x 1	80	16	6	4.9	5
	A2226M8	8 x 1.25	90	18	8	6.2	6.8
	A2226M10	10 x 1.5	100	20	10	8	8.5

TAP DIN 376

A2226	Tech. Code	d x p mm	L mm	l mm	d3 mm	s mm	Tapping hole mm
	A2226M12	12 x 1.75	110	25	9	7	10.3
	A2226M14	14 x 2		28	11	9	12

A2226	Tech. Code	d x p mm	L mm	l mm	d3 mm	s mm	Tapping hole mm
	A2226M16	16 x 2	110	28	12	9	14

KERFOLG SPIRAL FLUTE 48° TAPS - M

Inox
ITEM: A2227

ISO thread DIN 13 coarse pitch

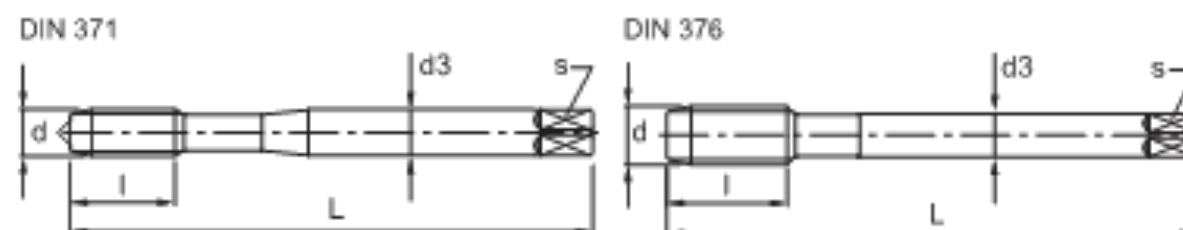
Tolerance 6H ISO 2

Surface finish TiNOX +

Thread depth ≤ 2.5XD

Hole type Blind

Chamfer form C 2/3

Application Stainless steel with R < 1400 N/mm²


< 500	< 850	< 1200	< 600	< 850	Duplex	< 240	< 300	< 10% Si	> 10% Si	Brass Copper	Bronze	Ti6Al4V	HTA	< 45	< 60
●			●	●	●										

TAP DIN 371

A2227	Tech. Code	d x p mm	L mm	l mm	d3 mm	s mm	Tapping hole mm
	A2227M3	3 x 0.5	56	5	3.5	2.7	2.5
	A2227M4	4 x 0.7	63	7	4.5	3.4	3.3
	A2227M5	5 x 0.8	70	8	6	4.9	4.2

A2227	Tech. Code	d x p mm	L mm	l mm	d3 mm	s mm	Tapping hole mm
	A2227M6	6 x 1	80	10	6	4.9	5
	A2227M8	8 x 1.25	90	13	8	6	6.8
	A2227M10	10 x 1.5	100	15	10	8	8.5

TAP DIN 376

A2227	Tech. Code	d x p mm	L mm	l mm	d3 mm	s mm	Tapping hole mm
	A2227M12	12 x 1.75	110	18	9	7	10.3
	A2227M14	14 x 2		20	11	9	12

A2227	Tech. Code	d x p mm	L mm	l mm	d3 mm	s mm	Tapping hole mm
	A2227M16	16 x 2	110	20	12	9	14