



EXTRUDED ALUMINIUM PROFILES




1018




1818




1025




2525




2550

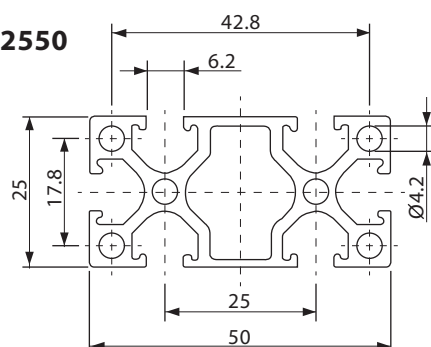


1825



4040



4080

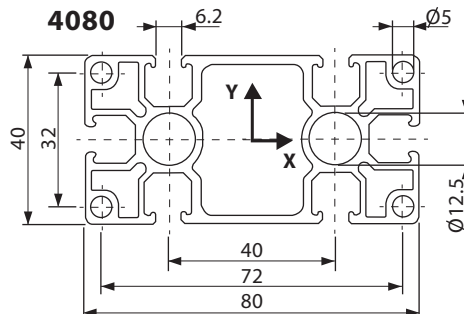

REFERENCE	INORMA	LENGTH	WEIGHT (g)
C10.AAPL.1018.1000	-	1000	250
C10.AAPL.1818.1000	NPC.FEP18181000	1000	425
C10.AAPX.1025.1000	NPC.FEP25101000	1000	310
C10.AAPX.1825.1000	NPC.FEP25181000	1000	400
C10.AAPX.2525.1000	NPC.FEP25251000	1000	610
C10.AAPX.2525.2000	NPC.FEP25252000	2000	1220
C10.AAPX.2550.1000	NPC.FEP25501000	1000	1040
C10.AAPX.2550.2000	NPC.FEP25502000	2000	2080
C10.AAPJ.4040.1000	NPC.FEP40401000	1000	1300
C10.AAPJ.4040.2000	NPC.FEP40402000	2000	2600
C10.AAPJ.4080.1000	-	1000	2302
C10.AAPJ.4080.2000	NPC.FEP40802000	2000	4603

Silver anodized aluminium