


HOSES

High Temperature Water and Oil Hose Assemblies

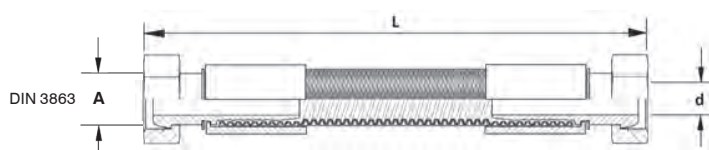

Stainless Steel Braided	Stainless Steel Braided + Red Silicone Jacket	Stainless Steel Braided + Blue Silicone Jacket	A	L	Hose ID (d)				Bend Radius
						Working Pressure (Bar)	Burst Pressure (Bar)		
T10300R1/4	T10300R1/4-R	T10300R1/4-B	1/4" BSPP	300	10	20	80		22
T10600R1/4	T10600R1/4-R	T10600R1/4-B		600					
T10800R1/4	T10800R1/4-R	T10800R1/4-B		800					
T101000R1/4	T101000R1/4-R	T101000R1/4-B		1000					
T101250R1/4	T101250R1/4-R	T101250R1/4-B		1250					
T101500R1/4	T101500R1/4-R	T101500R1/4-B		1500					
T102000R1/4	T102000R1/4-R	T102000R1/4-B		2000					
T10300M14	T10300M14-R	T10300M14-B	M14x1,5	300	10	20	80		22
T10600M14	T10600M14-R	T10600M14-B		600					
T10800M14	T10800M14-R	T10800M14-B		800					
T101000M14	T101000M14-R	T101000M14-B		1000					
T101250M14	T101250M14-R	T101250M14-B		1250					
T101500M14	T101500M14-R	T101500M14-B		1500					
T102000M14	T102000M14-R	T102000M14-B		2000					
T13300R3/8	T13300R3/8-R	T13300R3/8-B	3/8" BSPP	300	13	20	80		25
T13600R3/8	T13600R3/8-R	T13600R3/8-B		600					
T13800R3/8	T13800R3/8-R	T13800R3/8-B		800					
T131000R3/8	T131000R3/8-R	T131000R3/8-B		1000					
T131250R3/8	T131250R3/8-R	T131250R3/8-B		1250					
T131500R3/8	T131500R3/8-R	T131500R3/8-B		1500					
T132000R3/8	T132000R3/8-R	T132000R3/8-B		2000					

With 60° Cone Seat swivel fittings DIN 3863.

Tube:
Low profile helically convoluted PTFE (polytetrafluorethylene).

Reinforcement:
Stainless steel overbraid (Red/Blue Silicone cover).

Applications:
Designed for Water, Oil and chemical media for mould temperature controlling.

Temperature range:
Working temperature:
Max +260°C (+500°F)
RED/BLUE: Only +200°C (+392°F).

Tolerances:
ISO DIN 3302-1 E2.

See explanation of symbols on page 404