


DOCK AND LOCK GRIPPERS

MA.AGG – Engagement Gripper

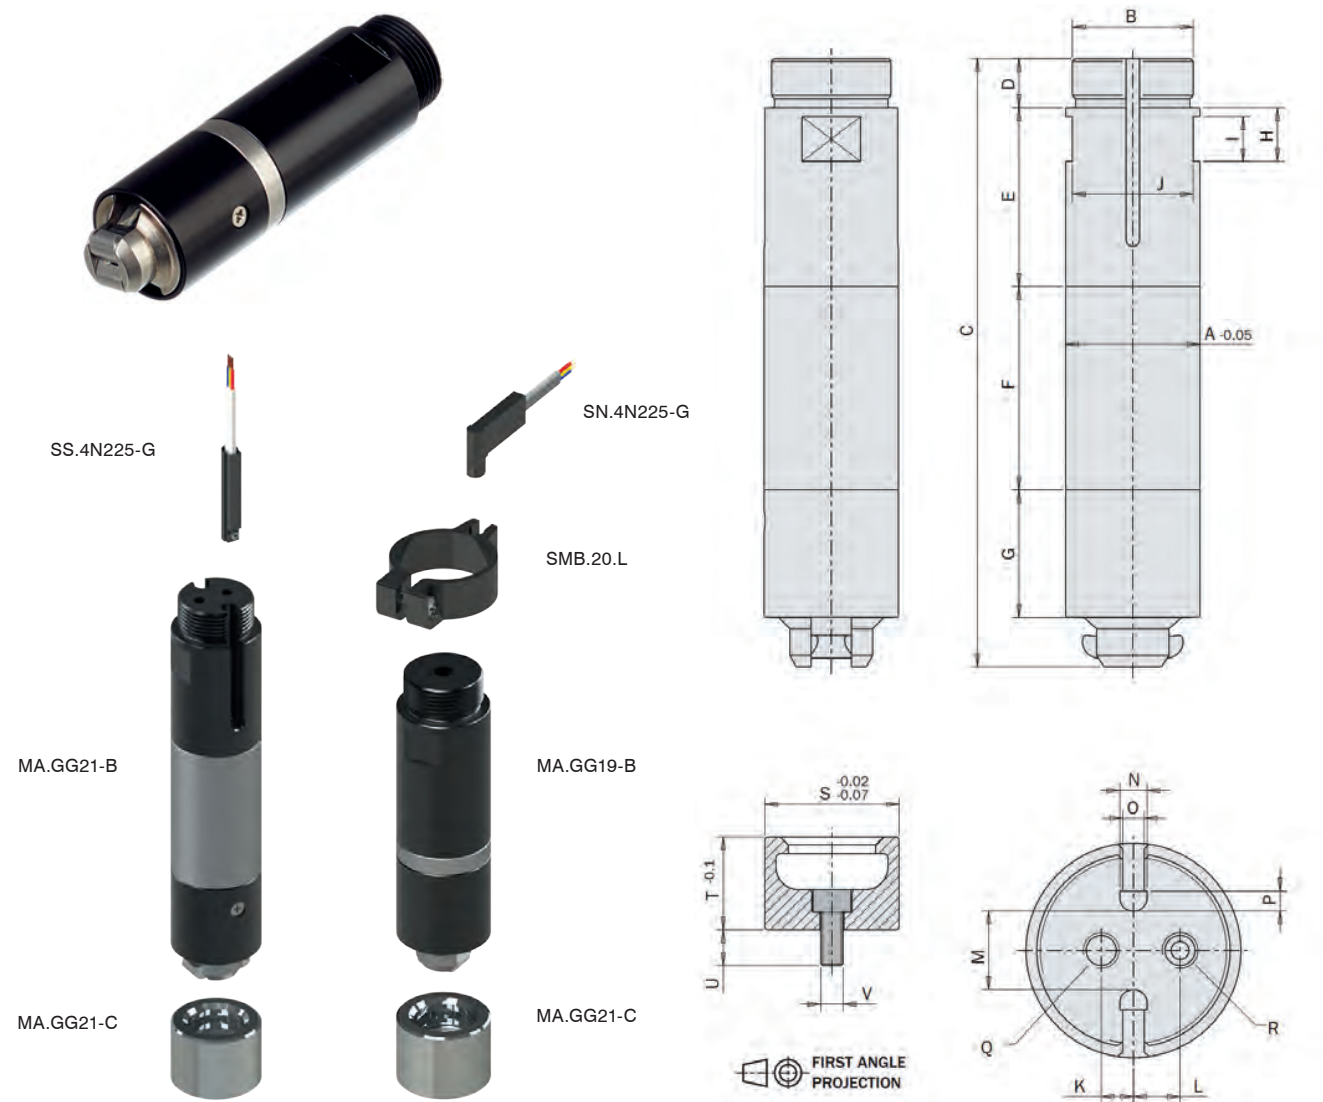

Part No.	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	Weight (g)
MA.GG19-B	Ø20	M17x1	70,5	8	32	4	19,5	10	8	18	0								85
MA.GG21-B	Ø20	M17x1	96,5	8	28	34	19,5	10	8	18	2,8	4,6	6	3,8	3	2,8	M3	M3	115

The MA.GG is used to provide a precise centering between the robot and the mould.
MA.GG... B is fitted to the Robot, MA.GG... C is fitted to the mould.
Ideal for insert loading.
MA.GG19-B: Single acting, spring return (NO).
MA.GG21-B: Double acting, with safety spring (NC).
Maximum operating pressure: 8 bar.
Operating temperature range: 5° to 60°C.



Part No.	S	T	U	V	Weight (g)
MA.GG21-C	Ø20	15,3	6,7	M4	25