


MP.OFL – Short Stroke Pneumatic Cylinder


Part No.	Stroke	Piston Bore	Closing force at 6 bar	Weight (g)
MP.OFL2010	10mm	20mm	130N	60
MP.OFL3015	15mm	30mm	300N	110
MP.OFL3030	30mm	30mm	300N	140

Double Acting and Non rotating.
Through hole for vacuum cup mounting - M5 or G1/8.
Ø20mm Clampable shaf.
Maximum operating pressure: 8 bar.
Operating temperature range: 5° to 60°C.
Optional magnetic sensors.

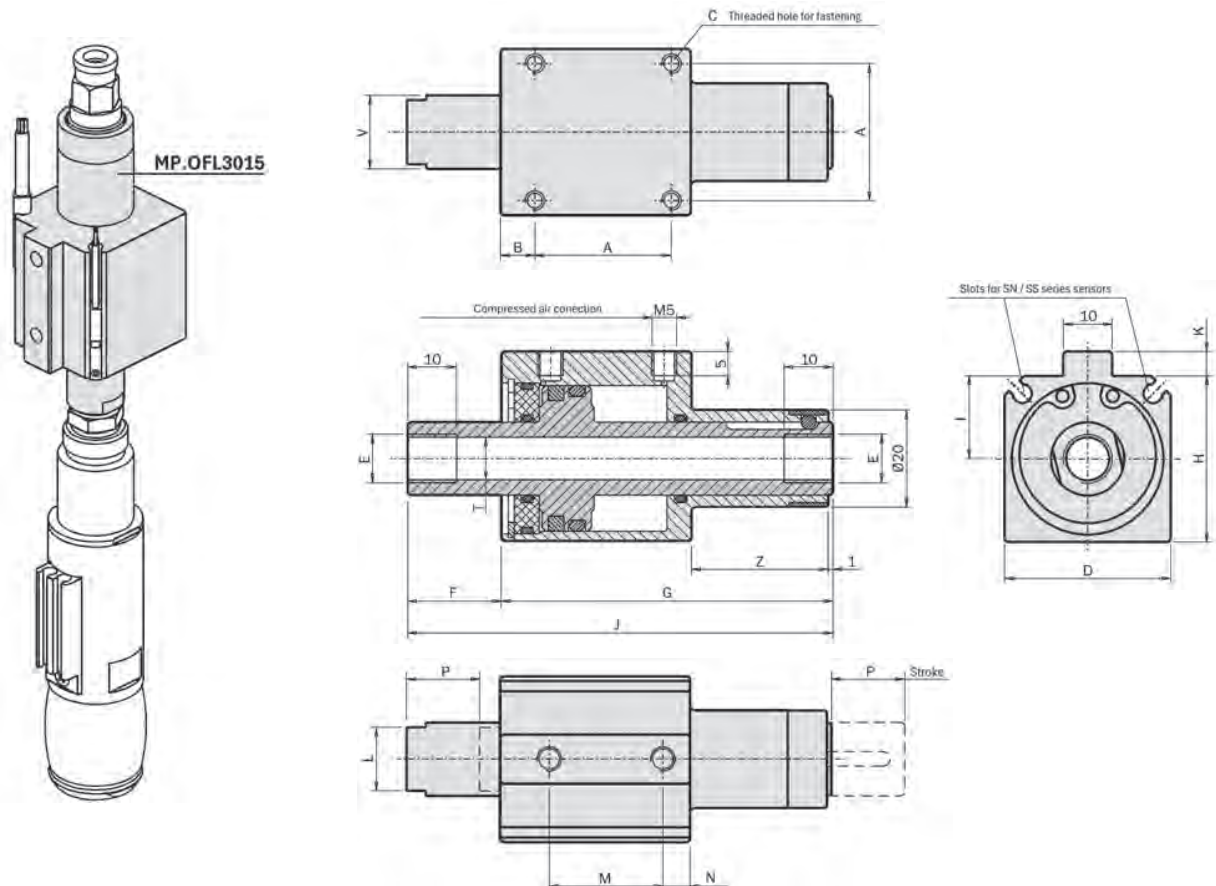

Part No.	A	B	C	D	E	F	G	H	I	J	K	L	M	N	P	T	V	Z
MP.OFL2010	19	9	M3x4	24	M5	14,2	59	25	13	74,2	4	8	16	5	10	Ø4.2	Ø10	28
MP.OFL3015	28	7	M4x6	34	G1/8	19,2	68	34	17	87,2	5	13	23,3	5,6	15	Ø8.8	Ø15	28
MP.OFL3030	28	7	M4x6	34	G1/8	34,2	91	34	17	125,2	5	13	38,3	5,6	30	Ø8.8	Ø15	36