
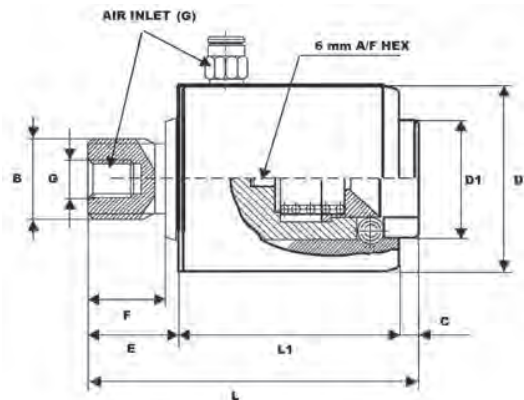



## Pneumatic Ejector Coupling

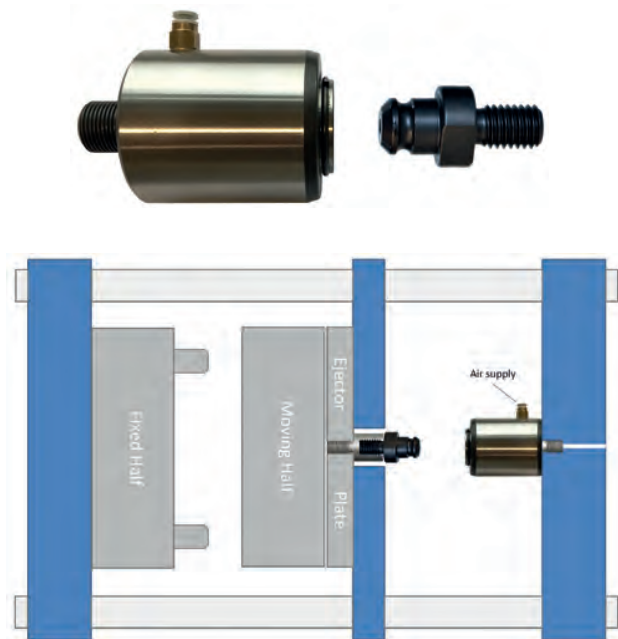

| Part No.   | D  | D1 | L  | L1   | E    | F  | B       | G 4-6 Bar | Pull Force | Size |   |
|------------|----|----|----|------|------|----|---------|-----------|------------|------|---|
| EJC-FP-200 | 48 | 39 | 68 | 28,5 | 21   | 15 | M16x2   | R1/8"     | 2700 kg    | 2    | 1 |
| EJC-FP-205 | 48 | 39 | 68 | 28,5 | 21   | 15 | M18x1,5 | R1/8"     | 2700 kg    | 2    | 1 |
| EJC-FP-300 | 58 | 36 | 94 | 66   | 22,5 | 20 | M20X1,5 | R1/8"     | 3400 kg    | 3    | 1 |
| EJC-FP-305 | 58 | 36 | 94 | 66   | 22,5 | 20 | M20X2,5 | R1/8"     | 3400 kg    | 3    | 1 |

Ejector Coupling to ensure rapid and safe mould changes designed to fit with standard EJC-M connectors.  
 The EJC-FP coupling is air operated. The coupling connects mechanical to the plug EJC-M, and disconnected using air in one of the 2 ports.  
 The Unit EJC-FP is installed on the machine and the plug EJC-M is installed on the mould/rod.

## Ejector Nipple

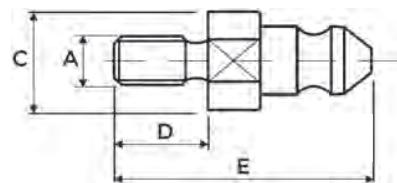

| Part No.  | A        | C    | D  | E    | Pull Force | Size |   |
|-----------|----------|------|----|------|------------|------|---|
| EJC-M-1-1 | M10X1,5  | 22,8 | 20 | 45,5 | 1500 kg    | 1    | 1 |
| EJC-M-1-2 | M12X1,75 | 22,8 | 20 | 45,5 | 1500 kg    | 1    | 1 |
| EJC-M-1-3 | M14X2    | 22,8 | 20 | 45,5 | 1500 kg    | 1    | 1 |
| EJC-M-1-4 | M16X2    | 22,8 | 20 | 45,5 | 1500 kg    | 1    | 1 |
| EJC-M-2-1 | M10X1,5  | 25,8 | 20 | 55   | 2400 kg    | 2    | 1 |
| EJC-M-2-2 | M12X1,75 | 25,8 | 20 | 55   | 2400 kg    | 2    | 1 |
| EJC-M-2-3 | M14X2    | 25,8 | 20 | 55   | 2400 kg    | 2    | 1 |
| EJC-M-2-4 | M16X2    | 25,8 | 20 | 55   | 2400 kg    | 2    | 1 |
| EJC-M-3-1 | M16X2    | 35   | 25 | 68   | 3200 kg    | 3    | 1 |
| EJC-M-3-2 | M18X2,5  | 35   | 25 | 68   | 3200 kg    | 3    | 1 |
| EJC-M-3-3 | M20X2,5  | 35   | 25 | 68   | 3200 kg    | 3    | 1 |
| EJC-M-3-4 | M24X3    | 35   | 25 | 68   | 3200 kg    | 3    | 1 |
| EJC-M-3-5 | M27X3    | 35   | 25 | 68   | 3200 kg    | 3    | 1 |
| EJC-M-3-6 | M30X3,5  | 35   | 25 | 68   | 3200 kg    | 3    | 1 |

Material: 1.7147 - 60 HRC.