




INTERNALLY HEATED NOZZLES

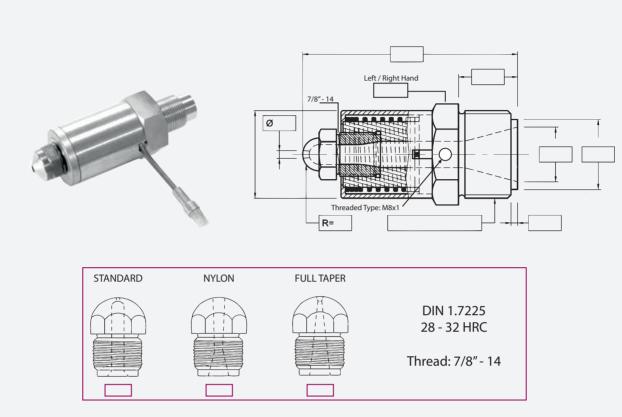

REQUIRED INFORMATION

Power	
Material to be used	
Viscosity Grade	
Cast Weight	
Injection time	
Screw Diameter	
Spiral resistor protection Compact design - 40 [mm] body of Better heat distribution Higher thermal load Quick and easy maintenance	liameter
Additional Information	on
Quantity:	E-mail:
Name:	Fax:
Company:	Address:
Telephone:	





Machine Model