


SPRUE GRIPPER - SERIES GS10

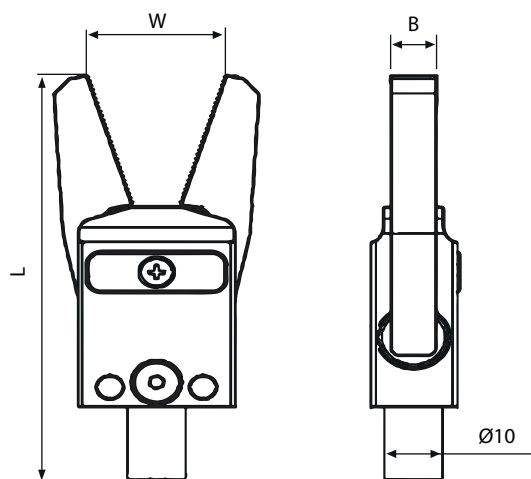

INORMA	JAW TYPE	SENSOR	L	W	B	OPEN/CLOSE (N/cm)	WEIGHT (g)
NPC.GS10B06	SERRATED	-	45	6.8	3	1/10	7
NPC.GS10B08	SERRATED	-	57	11	4	2/24	15
NPC.GS10C08	SILICONE PAD	-	55.1	10	4	2/24	15
NPC.GS10A12	DIAMOND PATTERN	-	82	22	8	5/80	53
NPC.GS10A12CP	SERRATED / DIAMOND PATTERN	PNP	82	20	8	5/80	60
NPC.GS10A12CN	SERRATED / DIAMOND PATTERN	NPN	82	20	8	5/80	60
NPC.GS10B12	SERRATED	-	82	22	8	5/80	50
NPC.GS10B12CP	SERRATED	PNP	82	20	8	5/80	58
NPC.GS10B12CN	SERRATED	NPN	82	20	8	5/80	58
NPC.GS10C12	SILICONE PAD	-	82	23	8	5/80	47
NPC.GS10C12CP	SILICONE PAD	PNP	82	21	8	5/80	55
NPC.GS10C12CN	SILICONE PAD	NPN	82	21	8	5/80	55
NPC.GS10D12	SAW TOOTH	-	82	22	8	5/80	75
NPC.GS10E12	EXTRA WIDE	-	82	22	8	5/80	55
NPC.GS10F12	CUSTOM	-	82	20	8	5/80	45

Air Inlet: M5. 2.5 - 8bar