

CA 4

90°
Angle head

MADAULA
creative solutions

Technical Data



Caractéristiques techniques / Technische Daten

	ISO-50 / DIN-2079
R.P.M max	Heavy duty bearings 2.000
	82 kg
	1:1
KW	40 kW
Nm max	280 Nm
Rotation	in = out

Other measures under request

Autres mesures sur demande


Weitere Maßnahmen auf Anfrage

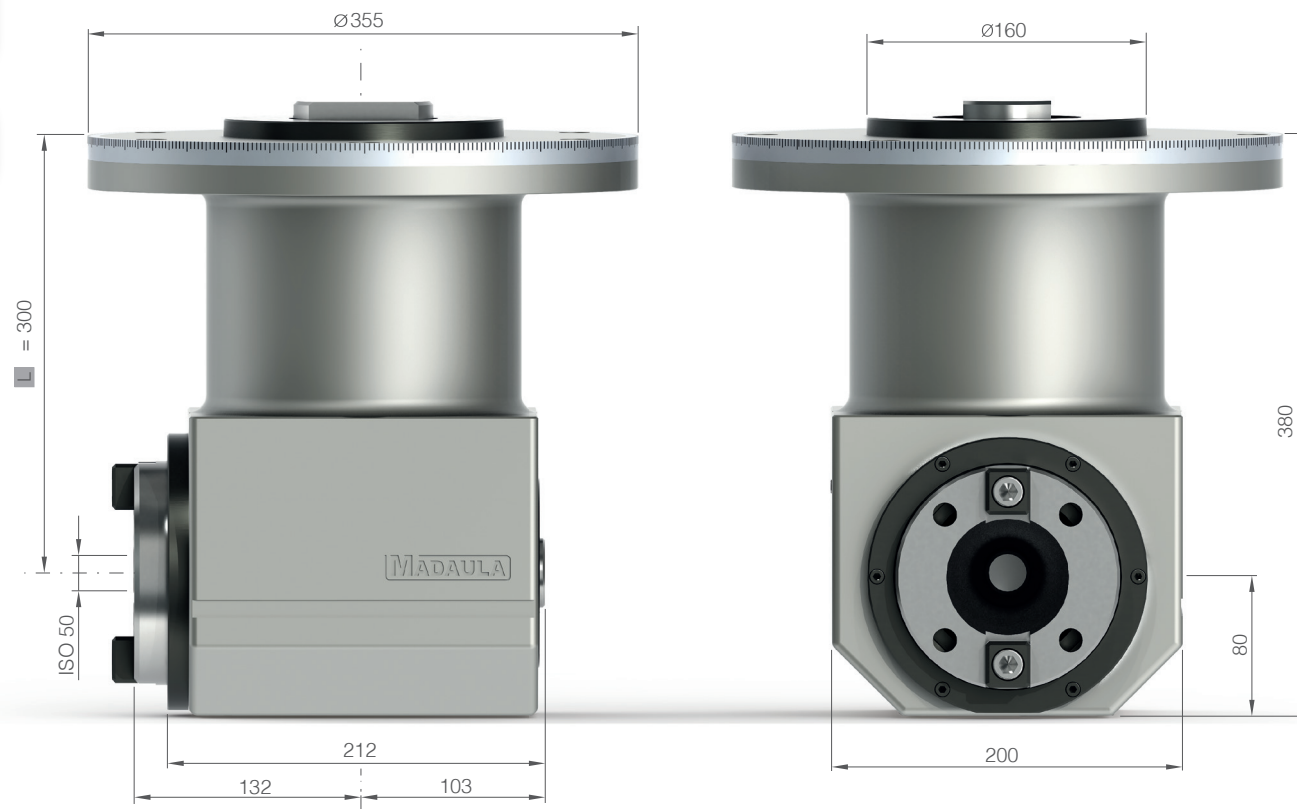

Flange mounted giving an increased rigidity.


Rigidité accrue lors du montage par flasque sur la machine.

Erhöhte Starrheit durch Flanscheinbau direkt an die Maschine.

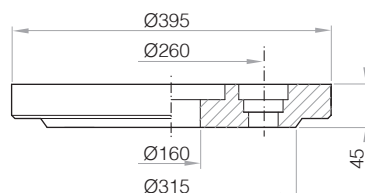

Standard Equipment

Standard / Standard



Optional Equipment

Optionel / Option

Internal air pressure

Suppression d'air interne / Sperrluft

bar/psi max 0.3/4

Quick change system

Système de changement rapide / Schnellwechselaufnahme

Alternative outputs

Sortie alternative / Alternative ausgänge

See page 55



High speed option RPM max

Haute vitesse en option RPM / Hochgeschwindigkeit optional UPM max

3.000